Bunch Length Measurements using Coherent Radiation

Rasmus Ischebeck, Christopher Barnes, Ian Blumenfeld, Franz-Josef Decker, Mark J. Hogan, Richard H. Iverson, Patrick Krejcik, Melissa Lincoln, Robert H. Siemann, Dieter Walz (Stanford Linear Accelerator Center),
Neil Kirby (Stanford University), Chris E. Clayton, Chengkun Huang, Devon K. Johnson, Wei Lu, Ken Marsh (University of California, Los Angeles), Suzhi Deng, Erdem Oz (University of Southern California)

Plasma Wakefield Acceleration

In the plasma wakefield acceleration experiment E-167 [1], an ultra-relativistic electron beam with a peak current above 10kA and a particle energy of 28GeV traverses a lithium vapor cell. The first part of the electron bunch creates a plasma by field-ionization and generates a plasma wake that accelerates the electrons in the back of the bunch. The process depends on the peak current and therefore on the bunch length. Furthermore, the charge distribution in the beginning and end of the bunch have a strong influence on the observed acceleration.

It is therefore desirable to determine the longitudinal bunch structure.

Several methods are currently used to achieve this.

A transversely deflecting cavity determines the bunch structure before the last compression step, at a bunch length of 50μm [2].

A measurement of the energy spectrum is compared to a particle tracking simulation using the code LiTrack [3], taking into account the wake fields in the accelerator [4].

A pyroelectric detector records the energy emitted by coherent transition radiation (CTR) on a titanium foil.

Finally, this CTR pulse is autocorrelated in a Michelson interferometer.

Measurements based on the electro-optic effect are currently being developed [6].





Existing Interferometer

In the present setup, transition radiation is emitted when the electron bunch passes a 1μm thin titanium foil, which spans an angle of 45° to the beam.
At wavelengths longer than the bunch length, the radiation is emitted coherently, and its power is increased by a factor equal to the number of electrons in the bunch.
Thus, an intense radiation pulse is emitted at wavelengths that correspond to a frequency in the Terahertz region.

Autocorrelation of the radiation is a convenient way to measure its duration.
A beam splitter separates the pulse and the two parts undergo a variable delay before they are overlaid again.
In the present setup of intensity autocorrelation, there is no nonlinear material or detector present;
the electric fields of the two partial beams add to produce a pulse that has twice the intensity for zero path length difference, and the rms width of the autocorrelation is a factor $\sqrt{2}$ larger than the rms pulse length.

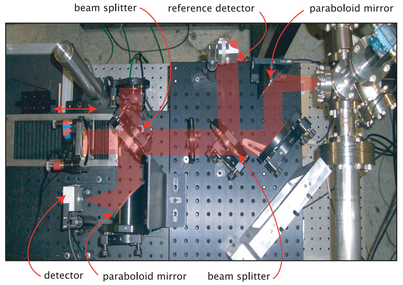

A Michelson interferometer has been set up to perform the autocorrelation. The autocorrelation is measured by scanning one of the mirrors. An analysis of the trace is compatible with a bunch length of 18μm rms. The setup and measurement results are detailed in Poster 2802 – RPAT082 [7].

Work supported by Department of Energy contracts DE-AC02-76SF00515 (SLAC), DE-FG03-92ER40745, DE-FG03-98DP00211, DE-FG03-92ER40727, DE-AC-03765F00098, and National Science Foundation grants No. ECS-9632735, DMS-9722121 and PHY-0078715.

Bunch Compression

In the summer of 2002, SLAC installed a new bunch compressor chicane for the SLAC linac at the 9 GeV beam energy point (1/3 way down the Linac).

Prior to installation of the chicane, the electron bunches had a typical length of 650 μm rms. With the chicane, the bunch is compressed in stages to a predicted minimum of 12 μm.

The compression process proceeds as follows (see Figure below). The initially 6 mm long 1.19 GeV bunch in the North Damping Ring is compressed to 1.3 mm in the transition from the damping ring to the linac (RTL). Once in the linac the bunch is given a correlated energy chirp as it is accelerated up to 9 GeV where it is compressed using the magnetic chicane to ~50 μm. In the remaining 2 km of linac the bunch is further accelerated to 28.5 GeV; here, wakefield effects introduce a further chirp which is used in a bend in the FFTB (called "dogleg") to compress the bunches to a length as short as 12 μm (30 fs) rms.

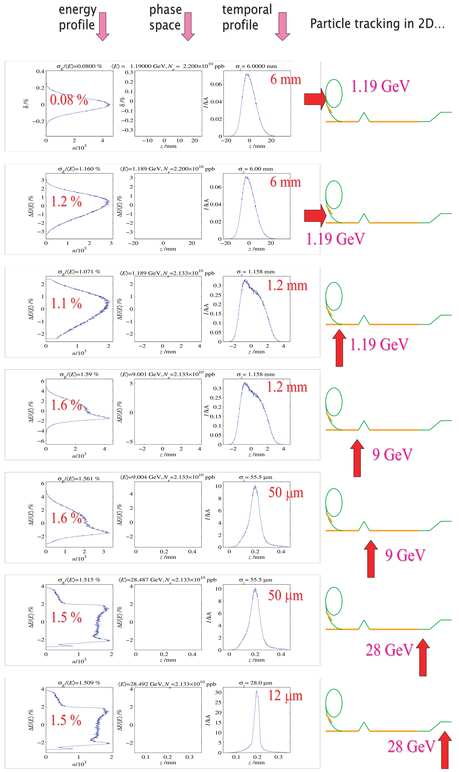

The plots show the development of the longitudinal phase space at different points in the accelerator, simulated by Paul Emma using the code LiTrack.

Materials

In the far infrared, traditional optical materials such as fused silica have a relatively high absorption coefficient.
Inorganic crystals such as potassium bromide (KBr) or thallium bromo-iodide (KRS5) can be used up to a wavelength of 25 and 33μm, respectively.
Polymers such as polyethene (PE), polytetrafluoroethene (PTFE) or polymethylpentene (TPX) are widely used as dielectrics for radiation up to the millimeter region. However, their absorption changes significantly across the wavelength region of interest here.
The present setup uses a beam splitter made from polyetheneterephthalate (PET) and a vacuum window of high-density polyethene (HDPE). HDPE is opaque for visible light, making alignment difficult.

Semiconductors have a low absorption coefficient for photons with an energy below the band gap. For high purity materials, the transmission can extend to wavelengths of several hundred micrometers.
Apart from a narrow absorption band around 16μm, silicon shows low absorption in the FIR spectrum [7]. However, no data is available between 30 and 60μm.
Its refractive index is 3.42, leading to a reflection of 30% on every surface.
While this is a nuisance for the vacuum window, it is quite advantageous for the beam splitter.
Another possible material is synthetic diamond. While it is more expensive than the other three materials considered here, it has the advantage of being transparent for visible light, making the alignment of the autocorrelator easier.
For silicon, an infrared laser has to be used.

The figures on the left show the transmission through three materials suitable for vacuum windows, namely fused silica, high-density polyethene and silicon.
The effect of these filters on a CTR pulse is shown in the right column.
The simulation includes the propagation of the electrons through the accelerator up to the CTR foil and the transmission of transition radiation through 1.5mm of the window material.



Silicon beam splitter

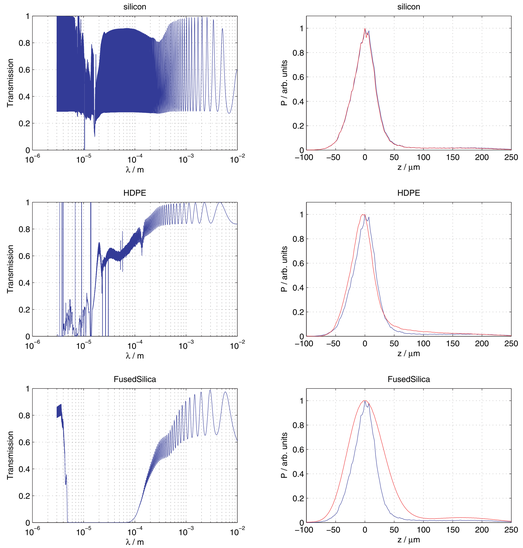

The simulations take into account the absorption in the material, the reflection on the surfaces and the interference between these reflections, yielding Fabry-Perot interferences.
Material data from [7].

Detectors

Quantum detectors such as photodiodes or photomultipliers do not respond to the low photon energies of THz radiation. Therefore, a radiometric detector such as a pyroelectric crystal has to be used: it reacts to temperature changes and its response to incident radiation energy should in principle be independent from the wavelength.
In the present setup, Coherent P1-45CC detectors are used. These consist of $LiTaO_3$ crystals that are covered by a coating which appears black in the visible range (see photo).
It has been observed that the interference between the reflections on the surfaces of these pyroelectric crystal cancels the electromagnetic field in the crystal for certain wavelengths, which leads to a significant wavelength dependency of the detector response [8].
It is questionable whether the coating that appears black solves this problem.
However, the wavelength dependency could be improved significantly by anti-reflective coatings on the crystal [9].

Pyroelectric Detectors

Pyroelectric Detectors
with a coating that appears black





Single-Shot Measurements

Modest timing variations in the accelerator have a considerable impact onto the bunch length. For example, a bunch timing variation of 500fs in the first part of the linear accelerator gives rise to a bunch length change of 15% at the experiment. Therefore, it is desirable to measure the length and shape of every bunch. A scanning interferometer cannot achieve this, as different path length differences are measured with different bunches.

In a Michelson interferometer, the two partial beams are always parallel when they overlap, independent of the alignment of the mirrors.
Possible configurations that overlay the beams at a small angle are shown below.
The path length difference depends on the transverse position, thus a segmented detector, e.g. the Spiricon Pyrocam can detect the complete interferogram in one shot.
It has to be verified whether its sensitivity is sufficient to detect the transition radiation, and whether it shows the same wavelength-dependent effects as the single pyroelectric detectors.
For alignment, it is important that it is possible to change the path length of one arm without changing the overlap and pointing angle.

In a single-shot autocorrelator, transverse differences in the intensity are interpreted as interference effects.
It is therefore important to separate these from spatial patterns on the beams themselves.
Most notably, the near-field pattern of transition radiation raises the problem of a vanishing intensity in the middle of the beam. The spatial distribution predicted by near-field diffraction theory has been confirmed by measurements [11].
This is particularly unfortunate since one expects constructive interference at zero path length difference, i.e. in the middle of the beam.
Therefore, spatial filtering of the radiation prior to the autocorrelator seems appropriate.
The effectiveness of such measures will be determined experimentally.

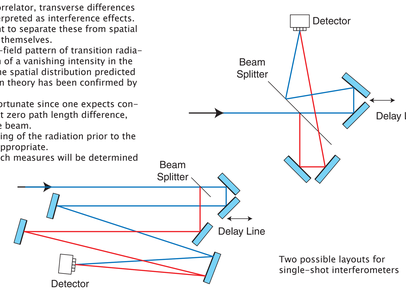

Two possible layouts for single-shot interferometers

Summary

The accelerating field that can be obtained in a beam-driven plasma wakefield accelerator depends on the current of the electron beam that excites the wake. In the E-167 experiment, a peak current above 10kA will be delivered at a particle energy of 28GeV. The bunch has a length of a few ten micrometers and several methods are used to measure its longitudinal profile. Among these, autocorrelation of coherent transition radiation (CTR) is employed. The beam passes a thin metallic foil, where it emits transition radiation. For wavelengths greater than the bunch length, this transition radiation is emitted coherently. This amplifies the long-wavelength part of the spectrum. A scanning Michelson interferometer is used to autocorrelate the CTR. However, this method requires the contribution of many bunches to build an autocorrelation trace. The measurement is influenced by the transmission characteristics of the vacuum window and beam splitter. We present here an analysis of materials, as well as possible layouts for a single shot CTR autocorrelator.

References

[1] F.-J. Decker et al. Multi-GeV plasma wakefield acceleration experiments, 2005. E-167 Proposal.

[2] R. Akre, L. Bentson, and P. Emma. Bunch length measurements using a transverse RF deflecting structure in the SLAC linac. In *Proceedings of the EPAC2002 conference*, 2002.

[3] P. Emma and K. Bane. LiTrack: A fast longitudinal phase space tracking code with graphical user interface. In *Proceedings of the 2005 Particle Accelerator Conference* 2005.

[4] M.J. Hogan et al. Multi-GeV energy gain in a plasma-wakefield accelerator. *To appear in Phys. Rev. Lett*, 2005.

[5] A.L. Cavalieri et al. Clocking femtosecond X rays. *Phys. Rev. Lett.*, 94:114801, 2005.

[6] P. Muggli et al. Measurement of the slac ultra-short bunch length using coherent transition radiation (ctr) autocorrelation. In *Proceedings of the 2005 Particle Accelerator Conference* 2005.

[7] E. Palik (ed.). *Handbook of Optical Constants of Solids*, volume 1. Academic Press, San Diego, 1998.

[8] K. Ricci. Longitudinal Electron Bunch Measurements at the *Stanford Superconducting Accelerator* PhD thesis, Stanford, 2000.

[9] S. Bauer et al. Thin metal films as absorbers for infrared sensors. *Sensors and Acturators A*, 37-38:497-501, 1993.

[10] D. Sütterlin et al. First results of a spatial auto-correlation interferometer with single shot capability using coherent transition radiation at the SLS pre-injector linac, 2005. to appear in: Proceedings of the DIPAC 2005 conference.

[11] D. Sütterlin et al. Development of a bunch-length monitor with sub-picosecond time resolution and single-shot capability. In *DIPAC 2003 Proceedings*, 2003.